


Outer frames


Profiles for both glass fibre and synthetic filter media

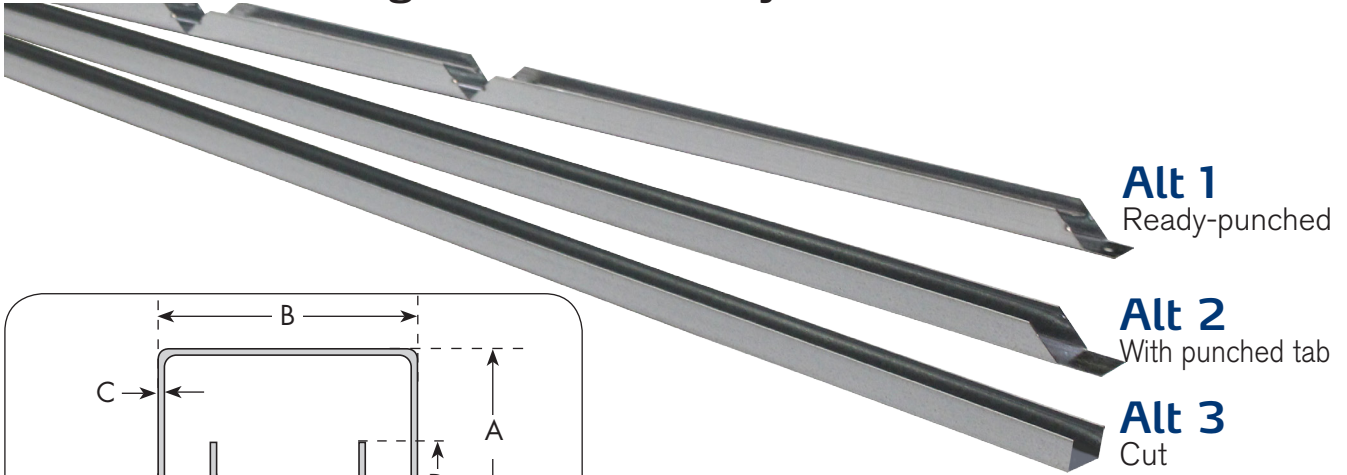

Alt 1
Ready-punched


Alt 2
With punched tab

Alt 3
Cut

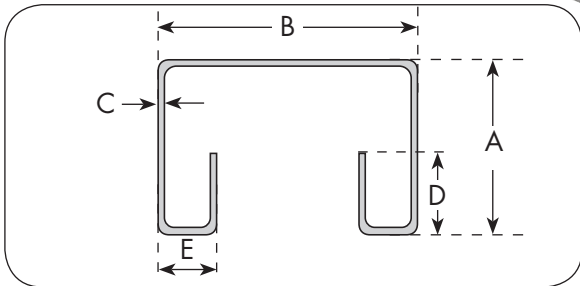


Steel sheet frame, galvanized

Art.no.	A	B	C	D	E	Weight/m**	Pcs/pallet
50020	17	25	0,7	8	5,5	430 g	850

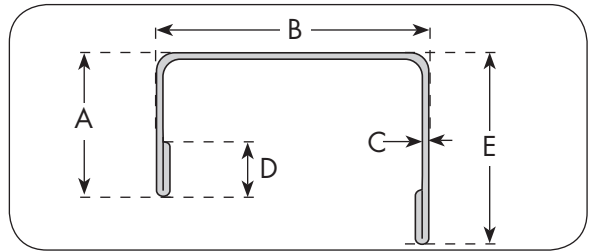


Steel sheet frame, galvanized

Art.no.	A	B	C	D	E	Weight/m**	Pcs/pallet
50025	14	25	0,6	3	21	300 g	1200
50025A	14	25	0,6	3	21	300 g	1200

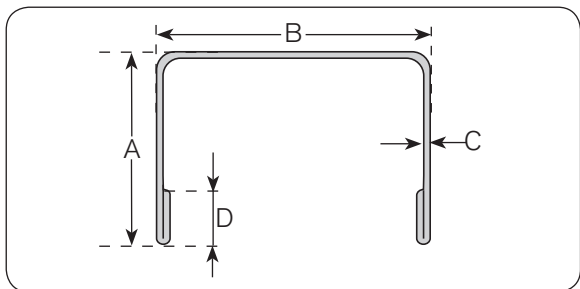

Steel sheet frame, galvanized

Art.no.	A	B	C	D	E	Weight/m**	Pcs/pallet
50010	16,5	18	0,6	5		276 g	1400
50021	16,3	20	0,6	4		276 g	1250
50022	16,5	22	0,6	3		276 g	1250
50024	20,0	20	0,6	3		300 g	1200
50024A	20,0	20	0,6	3	*	300 g	1200
50035	16,0	25	0,6	3		290 g	1200
50035A	16,0	25	0,6	3	*	290 g	1200
50035B	16,4	25	0,6	4		300 g	1200

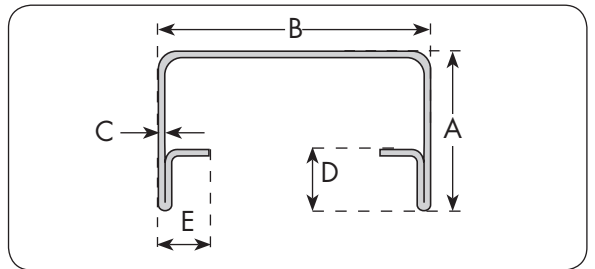


Steel sheet frame, galvanized

Art.no.	A	B	C	D	E	Weight/m**	Pcs/pallet
50040	18	24,6	0,5	8	5	316 g	950
50045	18	22,0	0,5	8	5	306 g	1000
50050	18	19,4	0,5	8	5	296 g	1100

*) Clipped frame

**) Weight/m refers to profile weight before punching.

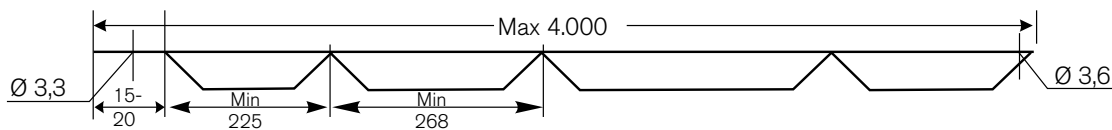

General tolerance for outer frames: +0/-1 mm.



SM Johannesson AB
Box 121, SE-334 22 Anderstorp, Sweden
Tel +46 371 58 87 00, Fax +46 371 58 87 01
www.smj.se, e-mail: info@smj.se